


GT721P GT722P GT724P

Low-Voltage, Low-noise, Rail-to-Rail I/O CMOS Op Amps

| 1 Features | 2 Application |
|--|---|
| <ul style="list-style-type: none"> - High gain bandwidth: 10 MHz - Rail-to-rail input and output - Low supply current: 1.4 mA/amplifier at 5 V - Input voltage range: -0.1 V to +5.6 V with $V_S=5.5$ V - Supply range: +2.2 V to +5.5 V - Operation temperature range: -40°C to +125°C | <ul style="list-style-type: none"> - Sensors - Photodiode amplification - Active filters - Test equipment - Driving A/D converters |

| 3 Description | Circuit Diagram |
|--|--|
| <p>The GT72XP families of products are low-voltage low-power operational amplifiers that can be designed into a wide range of applications. The GT72XP have a unity-gain bandwidth of 10MHz, a slew rate of 5.5V/μs, and a quiescent current of 1.4 mA/amplifier at 5V.</p> <p>The GT72XP families of products are designed to provide optimal performance in low-voltage systems. They provide rail-to-rail output swing into heavy loads. The input common-mode voltage range includes ground, and the maximum input offset voltage are 0.7mV (over recommended temperature range) for the devices. Their capacitive load capability is also good at low supply voltages. The operating range is from 2.2V to 5.5V.</p> |  |

4 Device Summary, Pin and Packages

Table.4-1. Device Summary⁽¹⁾

| Serial Name | Part Name | Package | Body Size (Nom) | Marking ⁽²⁾ | MSL ⁽³⁾ | Package Qty |
|-------------|-----------|-----------|----------------------|------------------------|--------------------|--------------------|
| GT721P | GT721PS5 | SOT23-5 | 2.90mm×1.60mm×1.10mm | GT721P XXXXX | 3 | Tape and Reel,3000 |
| | GT721PC5 | SC70-5 | 2.10mm×1.25mm×1.00mm | GT721P XXXX | 3 | Tape and Reel,3000 |
| | GT721PBS5 | SOT23-5 | 2.90mm×1.60mm×1.10mm | GT721PB XXXXX | 3 | Tape and Reel,3000 |
| | GT721PM8 | MSOP8 | 3.00mm×3.00mm×1.10mm | GT721P XXXXXXXX | 3 | Tape and Reel,4000 |
| | GT721PP8 | SOP8 | 4.90mm×3.90mm×1.75mm | GT721P XXXXXXXX | 3 | Tape and Reel,4000 |
| GT722P | GT722PM8 | MSOP8 | 3.00mm×3.00mm×1.10mm | GT722P XXXXXXXX | 3 | Tape and Reel,4000 |
| | GT722PP8 | SOP8 | 4.90mm×3.90mm×1.75mm | GT722P XXXXXXXX | 3 | Tape and Reel,4000 |
| | GT722PF8 | DFN2*2-8L | 2.00mm×2.00mm×0.75mm | GT722P XXXX | 3 | Tape and Reel,3000 |
| GT724P | GT724PPD | SOP14 | 8.65mm×3.90mm×1.75mm | GT724P XXXXXXXX | 3 | Tape and Reel,4000 |
| | GT724PTD | TSSOP14 | 5.00mm×4.40mm×1.20mm | GT724P XXXXXXXX | 3 | Tape and Reel,4000 |

(1) For all available packages, please contact product sales.

(2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.

(3) MSL, The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications.

(4) "XXXXX" in Marking will be appeared as the batch code.

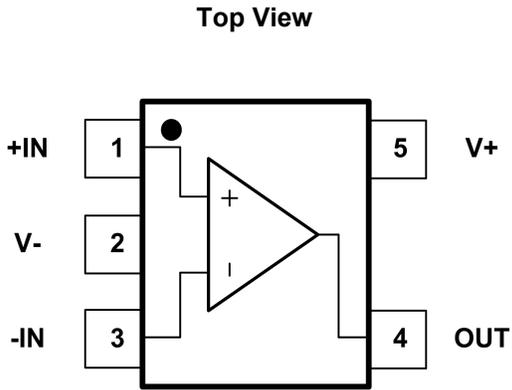
4 Device Summary, Pin and Packages(Continued)


Fig.4-1. GT721P: C5 (SC70-5) Package
GT721P: S5 (SOT23-5) Package

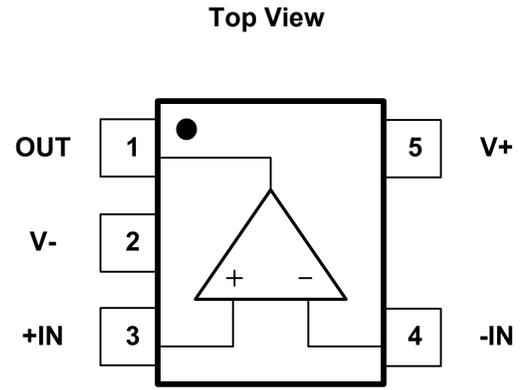


Fig.4-2. GT721PB: S5 (SOT23-5) Package

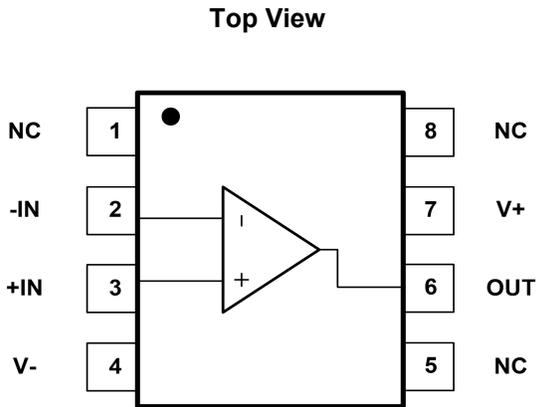


Fig.4-3. GT721P: M8 (MSOP8) Package
GT721P: P8 (SOP8) Package

Table.4-2. Pin Definition

| Name | Pin | | | I/O | Description |
|------|----------|-----|----------|-----|--|
| | C5 S5 | BS5 | M8 P8 | | |
| -IN | 3 | 4 | 2 | I | Inverting input |
| +IN | 1 | 3 | 3 | I | Noninverting input |
| NC | - | - | 1,5,8 | - | No internal connection (can be left floating) |
| OUT | 4 | 1 | 6 | O | Output |
| V- | 2 | 2 | 4 | - | Negative (lowest) supply or ground (for single-supply operation) |
| V+ | 5 | 5 | 7 | - | Positive (highest) supply |

* It is suggested to leave the unconnected pins floating.

4 Device Summary, Pin and Packages(Continued)

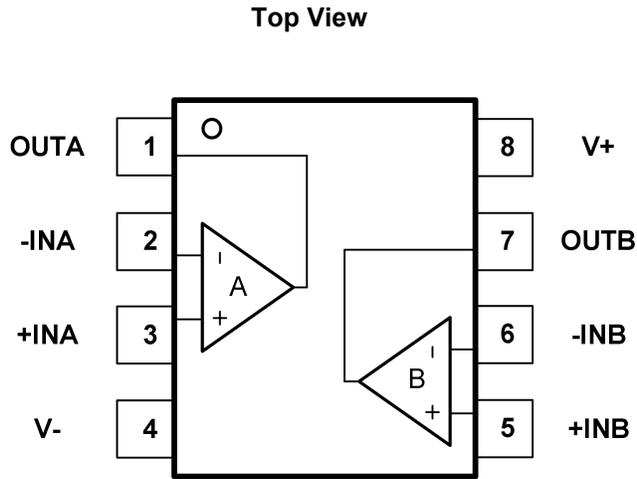


Fig.4-4. GT722P: M8(MSOP8) Package

GT722P: P8(SOP8) Package

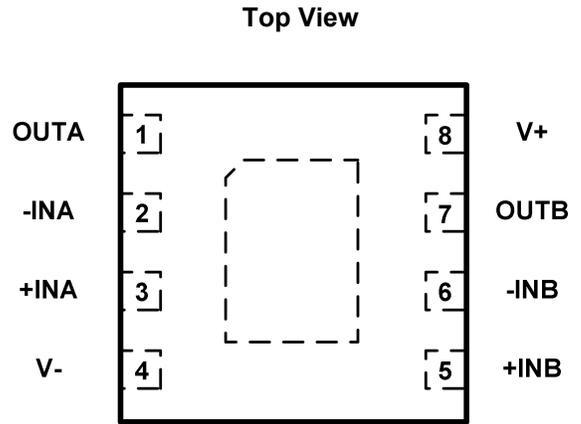



Fig.4-5. GT722P: F8(DFN2*2-8) Package

Table.4-3. Pin Definition

| Pin | | I/O | Description |
|------|----------|-----|--|
| Name | M8 P8 F8 | | |
| -INA | 2 | I | Inverting input, channel A |
| +INA | 3 | I | Noninverting input, channel A |
| -INB | 6 | I | Inverting input, channel B |
| +INB | 5 | I | Noninverting input, channel B |
| OUTA | 1 | O | Output, channel A |
| OUTB | 7 | O | Output, channel B |
| V- | 4 | - | Negative (lowest) supply or ground (for single-supply operation) |
| V+ | 8 | - | Positive (highest) supply |

* It is suggested to leave the unconnected pins floating.

4 Device Summary, Pin and Packages(Continued)

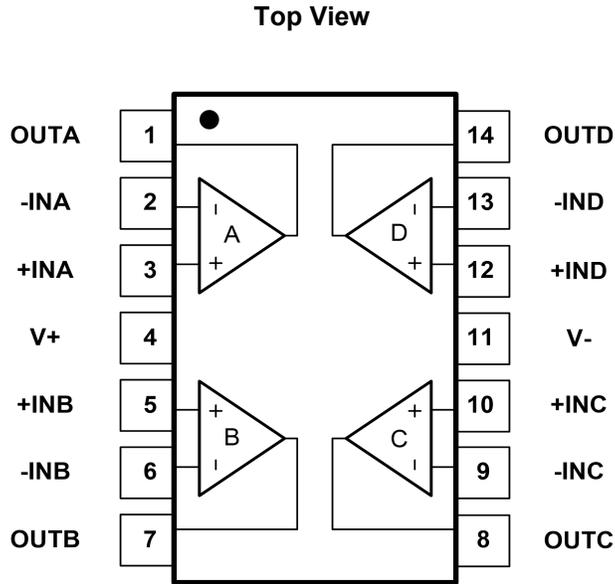

**Fig.4-6. GT724P: TD (TSSOP14) Package
GT724P: PD (SOP14) Package**

Table.4-4. Pin Definition

| Pin | | I/O | Description |
|------|-------|-----|--|
| Name | PD TD | | |
| -INA | 2 | I | Inverting input, channel A |
| +INA | 3 | I | Noninverting input, channel A |
| -INB | 6 | I | Inverting input, channel B |
| +INB | 5 | I | Noninverting input, channel B |
| -INC | 9 | I | Inverting input, channel C |
| +INC | 10 | I | Noninverting input, channel C |
| -IND | 13 | I | Inverting input, channel D |
| +IND | 12 | I | Noninverting input, channel D |
| OUTA | 1 | O | Output, channel A |
| OUTB | 7 | O | Output, channel B |
| OUTC | 8 | O | Output, channel C |
| OUTD | 14 | O | Output, channel D |
| V- | 11 | - | Negative (lowest) supply or ground (for single-supply operation) |
| V+ | 4 | - | Positive (highest) supply |

* It is suggested to leave the unconnected pins floating.

5 Voltage, Temperature, ESD and Thermal Ratings

5.1 Absolute Maximum Ratings⁽¹⁾

| Parameters | Min. | Max. | Unit |
|-------------------------------------|-----------------------|-----------------------|------|
| Supply Voltage $V_S=(V^+)-(V^-)$ | | 6.5 | V |
| Select Input Voltage ⁽²⁾ | (V ⁻)-0.5 | (V ⁺)+0.5 | V |
| Maximum Junction Temperature | -55 | 150 | °C |
| Storage Temperature Range | -55 | 150 | °C |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.3V beyond the supply rails should be current-limited to 10mA or less.

5.2 ESD Ratings

| ESD | | | Value | Unit |
|--------|-------------------------|---|-------|------|
| V(ESD) | Electrostatic discharge | Human-Body Model (HBM) ⁽¹⁾ | 3.5 K | V |
| | | Charged-Device Model (CDM) ⁽²⁾ | 2 K | V |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

| Symbol | Parameters | Min. | Max. | Unit |
|--------------------------------------|-----------------------|------|-------|------|
| Supply voltage, $V_{CC}=(V^+)-(V^+)$ | Single-supply | 2.2 | 5.5 | V |
| | Dual-supply | ±1.1 | ±2.75 | |
| TA | Operating temperature | -40 | 125 | °C |

5.4 Thermal Information

| Package Type | θ_{JA} | θ_{JC} | Unit |
|--------------|---------------|---------------|------|
| SC70-5 | 400 | 150 | °C/W |
| SOT23-5 | 250 | 81 | °C/W |
| MSOP8 | 210 | 45 | °C/W |
| SOP8 | 158 | 43 | °C/W |
| DFN2*2-8L | 100 | 60 | °C/W |
| TSSOP14 | 180 | 35 | °C/W |
| SOP14 | 120 | 36 | °C/W |

6 Electrical Specifications

$V_{CC}=5.0V$, $V_{cm}=V_{CC}/2$, and $R_L=10K\Omega$, FULL= $-40^{\circ}C$ to $+125^{\circ}C$, Typical values are at $T_A=+25^{\circ}C$. (unless otherwise noted)

| Parameters | Symbol | Conditions | Vcc | TA | Min. | Typ. | Max. | Unit |
|------------------------------------|-----------------|--|------|-------|-------|----------------|------|-------------------|
| Offset Voltage | | | | | | | | |
| Input Offset Voltage | Vos | GT724P | 5V | +25°C | -0.7 | | 0.7 | mV |
| | | GT722P | | | -0.5 | | 0.5 | |
| | | GT721P | | | -0.35 | | 0.35 | |
| Input Offset Voltage Average Drift | Vos TC | $-40^{\circ}C$ to $+125^{\circ}C$ | 5V | | | ± 1 | | $\mu V/^{\circ}C$ |
| Power-supply Rejection Ratio | PSRR | $V_{CC}=2.2V$ to $5V$, $V_{CM}=(V-)+0.5V$ | | +25°C | 70 | 95 | | dB |
| Input Voltage Range | | | | | | | | |
| Common-mode Voltage Range | Vcm | | 5.5V | +25°C | -0.1 | | 5.6 | V |
| Common-mode Rejection Ratio | CMRR | $V_{CM}=0V$ to $4.1V$ | 5.5V | +25°C | 57 | 88 | | dB |
| | | $V_{CM}=0V$ to $5.6V$ | | +25°C | 60 | 82 | | |
| Input Impedance | | | | | | | | |
| Differential | | | 5V | +25°C | | $10^{12} 1.3$ | | ΩpF |
| Common-mode | | | 5V | +25°C | | $10^{12} 8.6$ | | ΩpF |
| Input Bias Current | | | | | | | | |
| Input Bias Current | IB | | 5V | +25°C | 1 | 10 | | pA |
| Input Offset Current | IOS | | 5V | +25°C | 1 | 10 | | pA |
| Noise | | | | | | | | |
| Input Voltage Noise Density | en | f=1kHz | 5V | +25°C | | 8 | | nV/ \sqrt{Hz} |
| | | f=10kHz | 5V | +25°C | | 5.5 | | nV/ \sqrt{Hz} |
| Open-loop Gain | | | | | | | | |
| Open-loop Voltage Gain | AOL | $R_L=2K\Omega$, $V_O=0.15V$ to $4.85V$ | 5V | +25°C | 100 | 110 | | dB |
| | | | | FULL | 90 | | | |
| | | $R_L=10K\Omega$, $V_O=0.05V$ to $4.95V$ | 5V | +25°C | 105 | 110 | | |
| | | | | FULL | 95 | | | |
| Frequency Response | | | | | | | | |
| Gain Bandwidth Product | GBW | | 5V | +25°C | | 10 | | MHz |
| Phase Margin | PM | | 5V | +25°C | | 60 | | ° |
| Slew Rate | SR | | 5V | +25°C | | 5.5 | | V/ μs |
| Overload Recovery Time | t _{OR} | $V_{IN} \cdot Gain \geq V_S$ | 5V | +25°C | | 0.7 | | μs |

6 Electrical Specifications (Continued)

V_{cc}=5.0V, V_{cm}=V_{cc}/2, and R_L=10KΩ, FULL= -40°C to +125°C, Typical values are at TA=+25°C. (unless otherwise noted)

| Parameters | Symbol | Conditions | V _{cc} | TA | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------|------------|-----------------|-------|------|------|------|------|
| Output | | | | | | | | |
| Output Swing from Rail | | RL=2KΩ | 5V | +25°C | | 15 | | mV |
| | | | | FULL | | 20 | | |
| | | RL=10KΩ | | +25°C | | 5 | | |
| | | | | FULL | | 7 | | |
| Output Current | I _{out} | | 5V | +25°C | | 100 | | mA |
| | | | | FULL | | 90 | | |
| Power Supply | | | | | | | | |
| Quiescent Current/Amplifier | I _Q | | 5V | +25°C | | 1.4 | 2.5 | mA |

7 Typical Characteristics

$V_{cc}=5.0V$, $V_{cm}=V_{cc}/2$, and $R_L=10K\Omega$, FULL= $-40^{\circ}C$ to $+125^{\circ}C$, Typical values are at $T_A=+25^{\circ}C$. (unless otherwise noted)

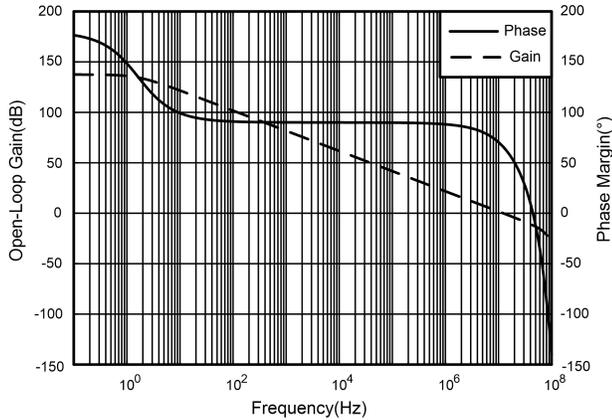


Fig.7-1. Open-Loop Gain and Phase vs Frequency

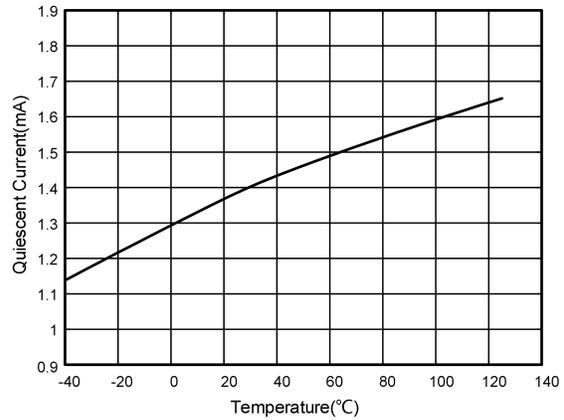


Fig.7-2. Quiescent Current vs Temperature

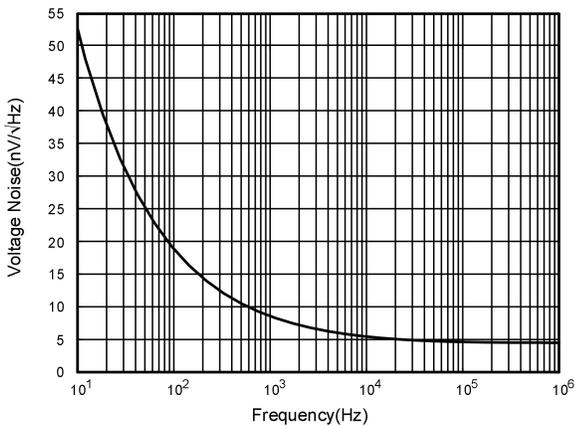


Fig.7-3. Voltage Noise vs Frequency

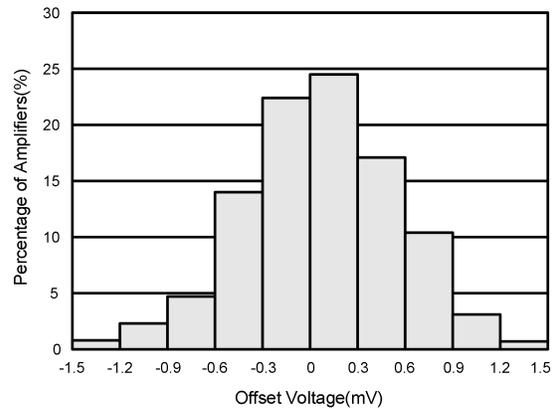


Fig.7-4. Offset Voltage Production Distribution

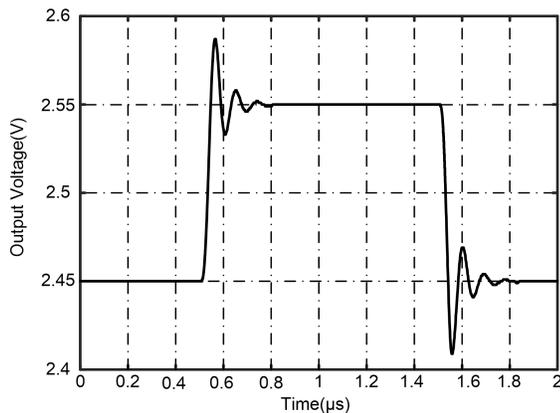


Fig.7-5. Small-Signal Step Response

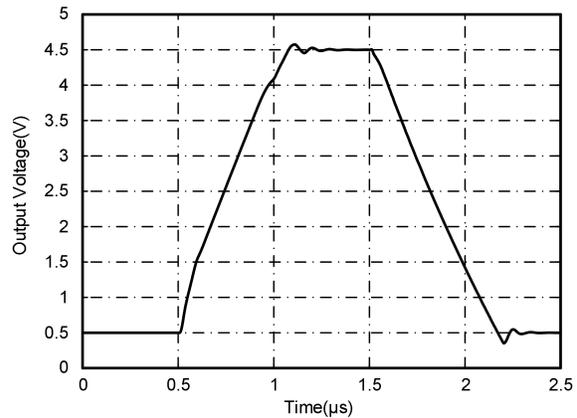


Fig.7-6. Large-Signal Step Response

8 Detailed Description

The GT72XP families of products are rail-to-rail operational amplifiers that can be run from a single-supply voltage 2.2V to 5.5V ($\pm 1.1V$ to $\pm 2.75V$). Supply voltages higher than 6.5V (absolute maximum) can permanently damage the amplifier. Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1uF capacitor closely across the supply pins. These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

9 Application Note

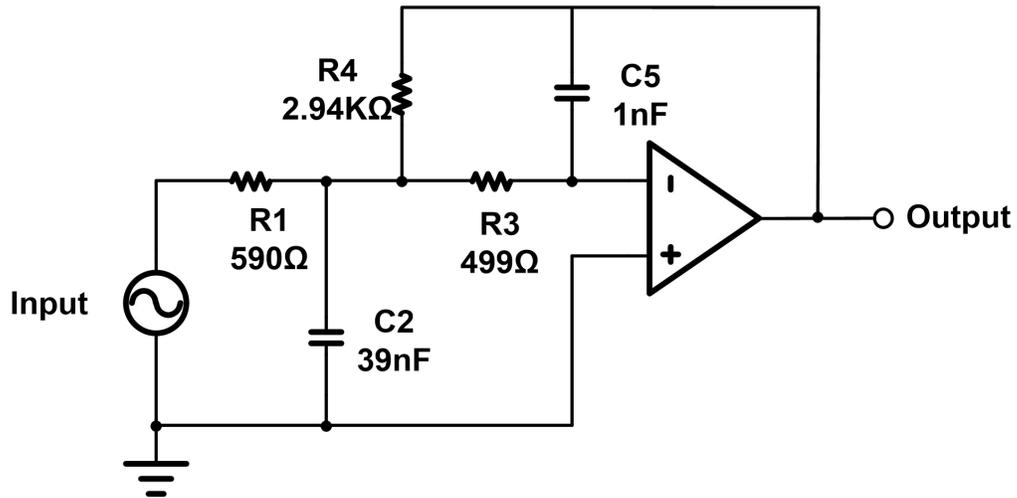


Fig.9-1. 25-kHz Low-pass Filter



Low-pass filters are commonly employed in signal processing applications to reduce noise and prevent aliasing. The GT72XP devices are ideally suited to construct high-speed, high-precision active filters. Fig.9-1 shows a second-order, low-pass filter commonly encountered in signal processing applications.

Use the following parameters for this design example:



- Gain = 5V/V (inverting gain)
- Low-pass cutoff frequency = 25kHz
- Second-order Chebyshev filter response with 3-dB gain peaking in the passband

10 Package Outline Dimension


SOT23-5

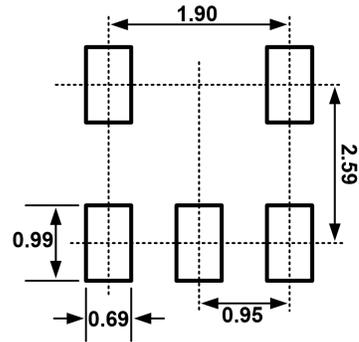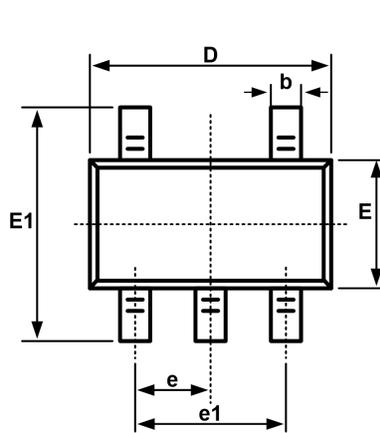





Recommended Land Pattern (Unit: mm)

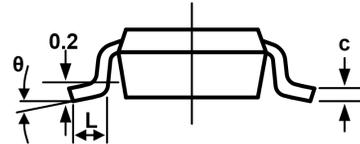


| Symbol | Dimensions in Millimeters | | Dimensions in Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| L1 | 0.600REF | | 0.024REF | |
| θ | 0° | 8° | 0° | 8° |

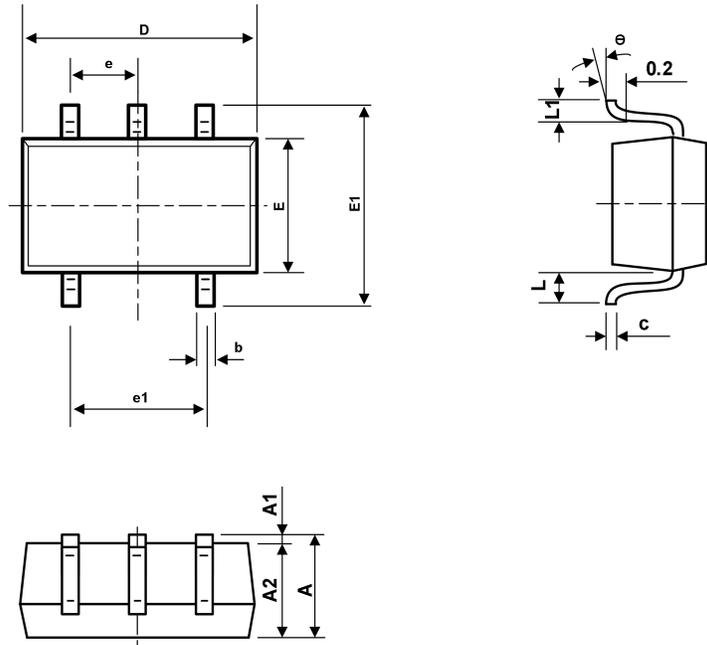10 Package Outline Dimension(Continued)
SC70-5


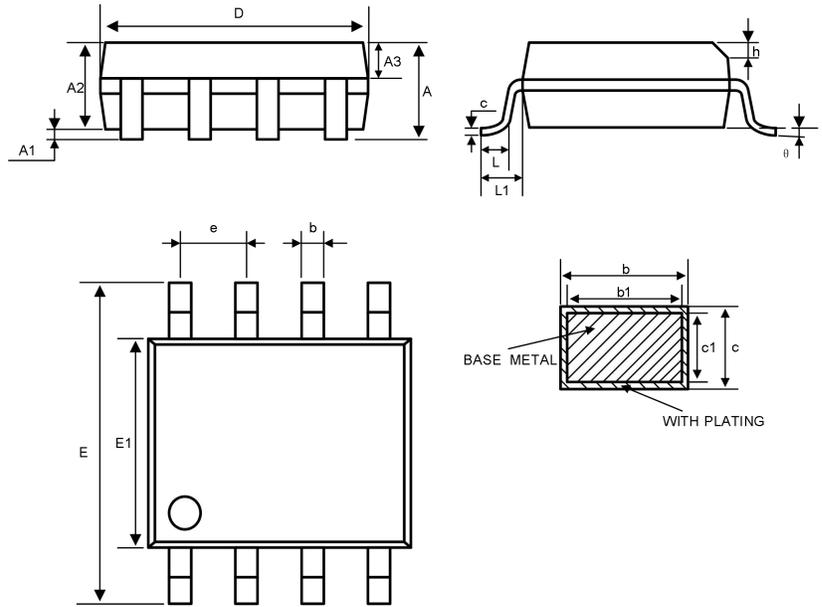
| Symbol | Dimensions in Millimeters | | Dimensions in Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.900 | 1.100 | 0.035 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.000 | 0.035 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| c | 0.110 | 0.175 | 0.004 | 0.007 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.650TYP | | 0.026TYP | |
| e1 | 1.200 | 1.400 | 0.047 | 0.055 |
| L | 0.525REF | | 0.021REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |

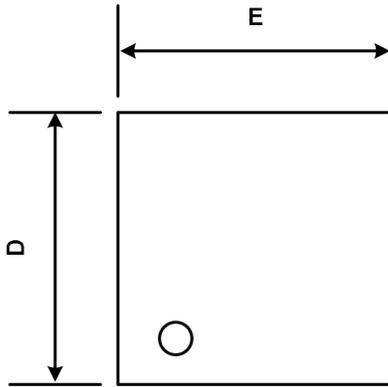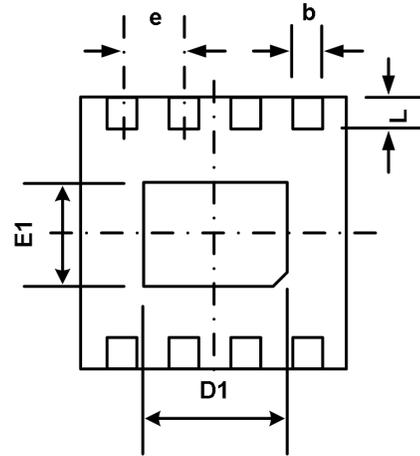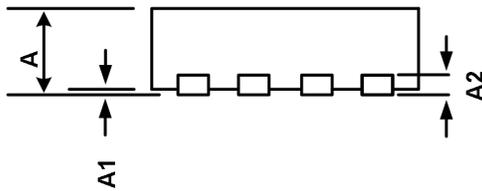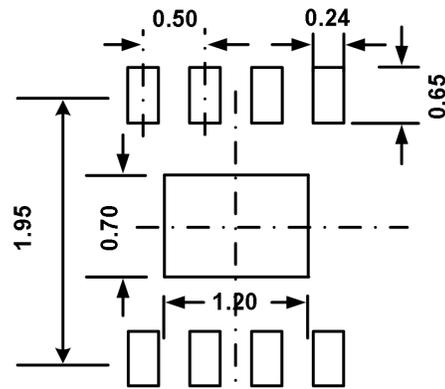10 Package Outline Dimension(Continued)
DFN2*2-8L

TOP VIEW

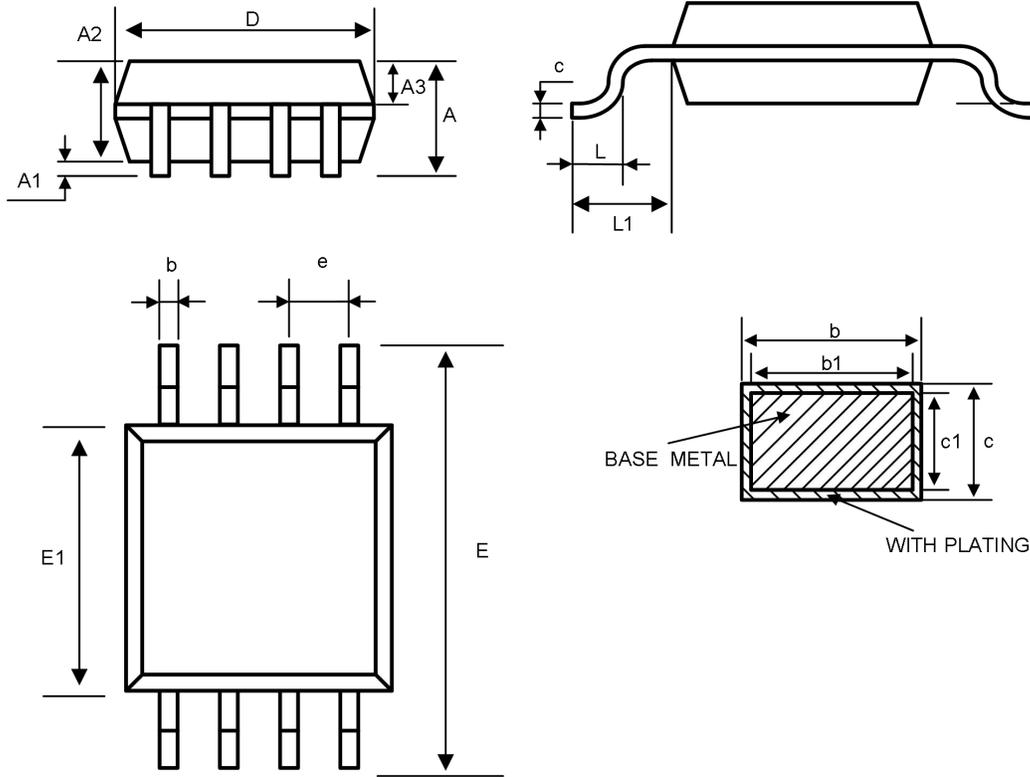BOTTOM VIEW

SIDE VIEW

RECOMMENDED LAND PATTERN(unit:mm)


| Symbol | Dimensions in Millimeters | | Dimensions in Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.700 | 0.800 | 0.028 | 0.031 |
| A1 | 0.000 | 0.050 | 0.000 | 0.002 |
| A2 | 0.203(TYP) | | 0.035(TYP) | |
| b | 0.180 | 0.300 | 0.007 | 0.012 |
| D | 1.900 | 2.100 | 0.075 | 0.083 |
| D1 | 1.100 | 1.300 | 0.043 | 0.051 |
| E | 1.900 | 2.100 | 0.075 | 0.083 |
| E1 | 0.600 | 0.800 | 0.024 | 0.031 |
| e | 0.500(TYP) | | 0.020(TYP) | |
| L | 0.250 | 0.450 | 0.010 | 0.018 |

10 Package Outline Dimension(Continued)
MSOP8


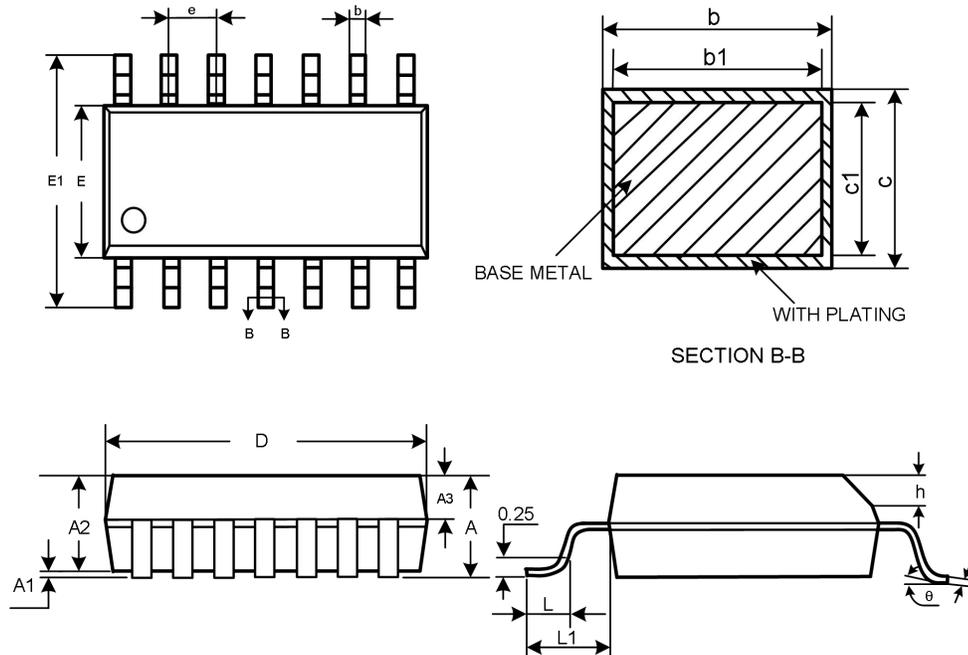
| Symbol | Dimensions in Millimeters | | | Dimensions in Inches | | |
|----------|---------------------------|------|------|----------------------|-------|-------|
| | Min. | Nom. | Max. | Min. | Nom. | Max. |
| A | — | — | 1.10 | — | — | 0.043 |
| A1 | 0.05 | — | 0.15 | 0.002 | — | 0.006 |
| A2 | 0.75 | 0.85 | 0.95 | 0.030 | 0.033 | 0.037 |
| A3 | 0.30 | 0.35 | 0.40 | 0.012 | 0.014 | 0.016 |
| b | 0.28 | — | 0.36 | 0.011 | — | 0.014 |
| b1 | 0.27 | 0.30 | 0.33 | 0.011 | 0.012 | 0.013 |
| c | 0.15 | — | 0.19 | 0.006 | — | 0.007 |
| c1 | 0.14 | 0.15 | 0.16 | 0.006 | 0.006 | 0.006 |
| D | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| E | 4.70 | 4.90 | 5.10 | 0.185 | 0.193 | 0.201 |
| E1 | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| e | 0.65BSC | | | 0.026BSC | | |
| L | 0.40 | — | 0.70 | 0.016 | — | 0.028 |
| L1 | 0.95REF | | | 0.037REF | | |
| θ | 0 | — | 8° | 0 | — | 8° |

10 Package Outline Dimension(Continued)
SOP8


| Symbol | Dimensions in Millimeters | | | Dimensions in Inches | | |
|--------|---------------------------|------|-------|----------------------|-------|-------|
| | Min. | Nom. | Max. | Min. | Nom. | Max. |
| A | — | — | 1.75 | — | — | 0.069 |
| A1 | 0.10 | — | 0.225 | 0.004 | — | 0.009 |
| A2 | 1.30 | 1.40 | 1.50 | 0.051 | 0.055 | 0.059 |
| A3 | 0.60 | 0.65 | 0.70 | 0.024 | 0.026 | 0.028 |
| b | 0.39 | — | 0.47 | 0.015 | — | 0.019 |
| b1 | 0.38 | 0.41 | 0.44 | 0.015 | 0.016 | 0.017 |
| c | 0.20 | — | 0.24 | 0.008 | — | 0.009 |
| c1 | 0.19 | 0.20 | 0.21 | 0.007 | 0.008 | 0.008 |
| D | 4.80 | 4.90 | 5.00 | 0.189 | 0.193 | 0.197 |
| E | 5.80 | 6.00 | 6.20 | 0.228 | 0.236 | 0.244 |
| E1 | 3.80 | 3.90 | 4.00 | 0.150 | 0.154 | 0.157 |
| e | 1.27BSC | | | 0.05BSC | | |
| h | 0.25 | — | 0.50 | 0.010 | — | 0.020 |
| L | 0.50 | — | 0.80 | 0.020 | — | 0.031 |
| L1 | 1.05REF | | | 0.041REF | | |
| θ | 0 | — | 8° | 0 | — | 8° |

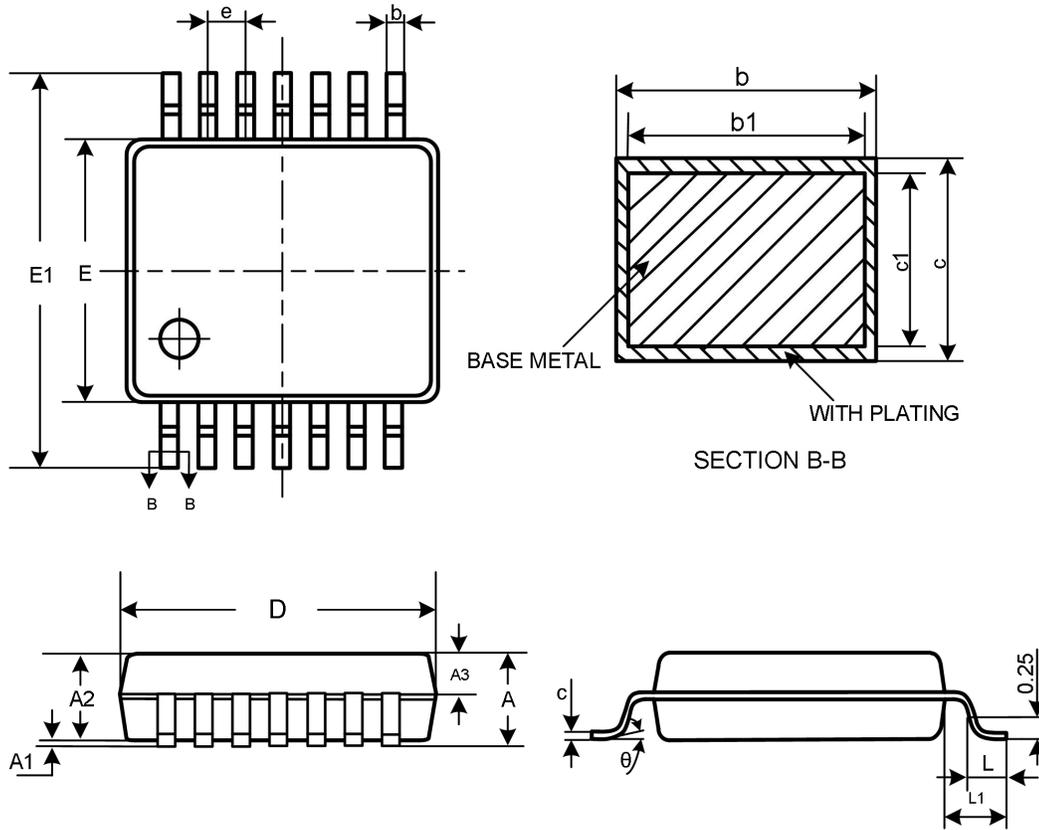
10 Package Outline Dimension(Continued)
TSSOP14


| SYMBOL | Dimensions in Millimeters | | | Dimensions in Inches | | |
|----------|---------------------------|------|------|----------------------|-------|-------|
| | Min. | Nom. | Max. | Min. | Nom. | Max. |
| A | — | — | 1.20 | — | — | 0.047 |
| A1 | 0.05 | — | 0.15 | 0.002 | — | 0.006 |
| A2 | 0.90 | 1.00 | 1.05 | 0.035 | 0.039 | 0.041 |
| A3 | 0.39 | 0.44 | 0.49 | 0.015 | 0.017 | 0.019 |
| b | 0.20 | — | 0.28 | 0.008 | — | 0.011 |
| b1 | 0.19 | 0.22 | 0.25 | 0.007 | 0.009 | 0.010 |
| c | 0.13 | — | 0.17 | 0.005 | — | 0.007 |
| c1 | 0.12 | 0.13 | 0.14 | 0.005 | 0.005 | 0.006 |
| D | 4.90 | 5.00 | 5.10 | 0.193 | 0.197 | 0.201 |
| E | 4.30 | 4.40 | 4.50 | 0.169 | 0.173 | 0.177 |
| E1 | 6.20 | 6.40 | 6.60 | 0.244 | 0.252 | 0.260 |
| e | 0.65BSC | | | 0.026BSC | | |
| L | 0.45 | 0.60 | 0.75 | 0.018 | 0.024 | 0.030 |
| L1 | 1.00BCS | | | 0.039BSC | | |
| θ | 0 | — | 8° | 0 | — | 8° |

10 Package Outline Dimension(Continued)
SOP14


| SYMBOL | Dimensions in Millimeters | | | Dimensions in Inches | | |
|--------|---------------------------|------|-------|----------------------|-------|-------|
| | Min. | Nom. | Max. | Min. | Nom. | Max. |
| A | — | — | 1.75 | — | — | 0.069 |
| A1 | 0.10 | — | 0.225 | 0.004 | — | 0.009 |
| A2 | 1.30 | 1.40 | 1.50 | 0.051 | 0.055 | 0.059 |
| A3 | 0.60 | 0.65 | 0.70 | 0.024 | 0.026 | 0.028 |
| b | 0.39 | — | 0.47 | 0.015 | — | 0.019 |
| b1 | 0.38 | 0.41 | 0.44 | 0.015 | 0.016 | 0.017 |
| c | 0.20 | — | 0.24 | 0.20 | — | 0.24 |
| c1 | 0.19 | 0.20 | 0.21 | 0.007 | 0.008 | 0.008 |
| D | 8.55 | 8.65 | 8.75 | 0.337 | 0.341 | 0.344 |
| E1 | 5.80 | 6.00 | 6.20 | 0.228 | 0.236 | 0.244 |
| E | 3.80 | 3.90 | 4.00 | 0.150 | 0.154 | 0.157 |
| e | 1.27BSC | | | 0.05BSC | | |
| h | 0.25 | — | 0.50 | 0.010 | — | 0.020 |
| L | 0.50 | — | 0.80 | 0.020 | — | 0.031 |
| L1 | 1.05REF | | | 0.041REF | | |
| θ | 0 | — | 8° | 0 | — | 8° |

11 Tape and Reel Information

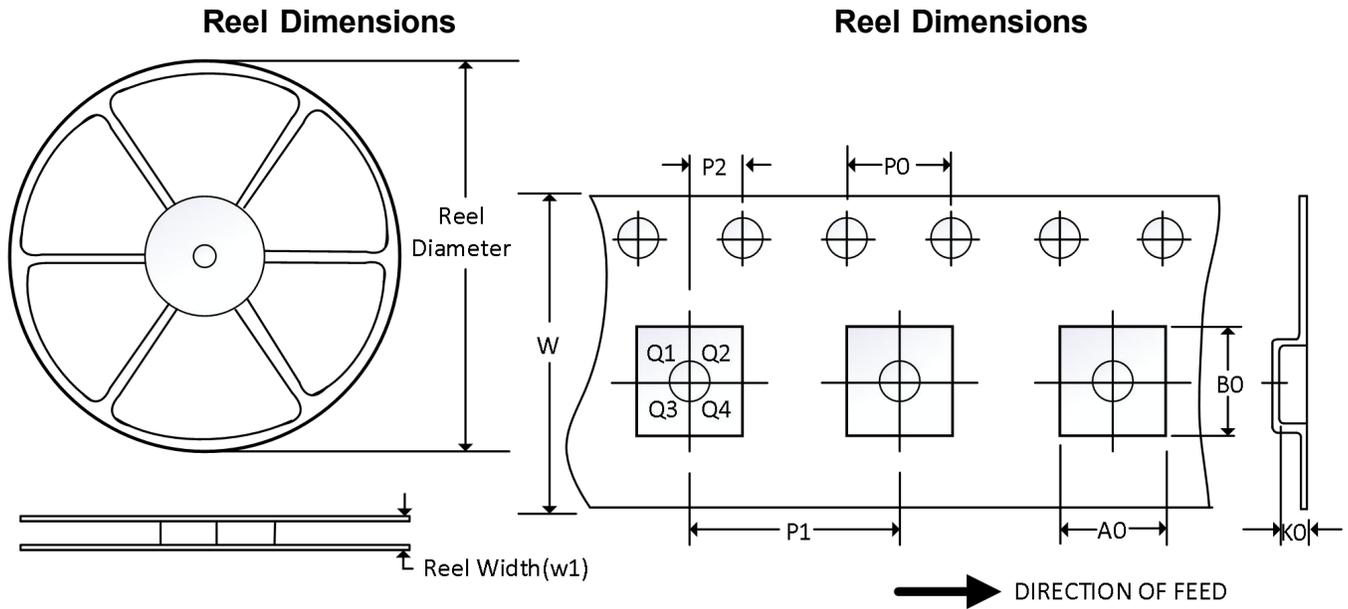

NOTE: The picture is only for reference. Please make the object as the standard.

Key Parameter List of Tape and Reel

| Package Type | Reel Diameter | Reel Width (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|-----------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SC70-5 | 7" | 9.5 | 2.25 | 2.55 | 1.20 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| SOT23-5 | 7" | 9.5 | 3.20 | 3.20 | 1.40 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| DFN2*2-8L | 7" | 9.5 | 2.30 | 2.30 | 1.10 | 4.0 | 4.0 | 2.0 | 8.0 | Q2 |
| MSOP8 | 13" | 12.4 | 5.20 | 3.30 | 1.50 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| SOP8 | 13" | 12.4 | 6.40 | 5.40 | 2.10 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| TSSOP14 | 13" | 12.4 | 6.95 | 5.60 | 1.20 | 4.0 | 8.0 | 2.0 | 12.0 | Q1 |
| SOP14 | 13" | 16.4 | 6.60 | 9.30 | 2.10 | 4.0 | 8.0 | 2.0 | 16.0 | Q1 |

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.